

## P4 Outdoor 320x160mm LED Module Specification


Model No.: **P4-O10S-SMD2525-80x40**


### LED Lamp Specification



Color	Package	Intensity	Viewing Angle	Wavelength	Testing Conditions
Red	SMD2525	330-500mcd	120°	620-625nm	25°C,15mA
Green		550-900mcd	120°	514-535nm	25°C,8mA
Blue		80-140mcd	120°	460-475nm	25°C,5mA

### Module Photo

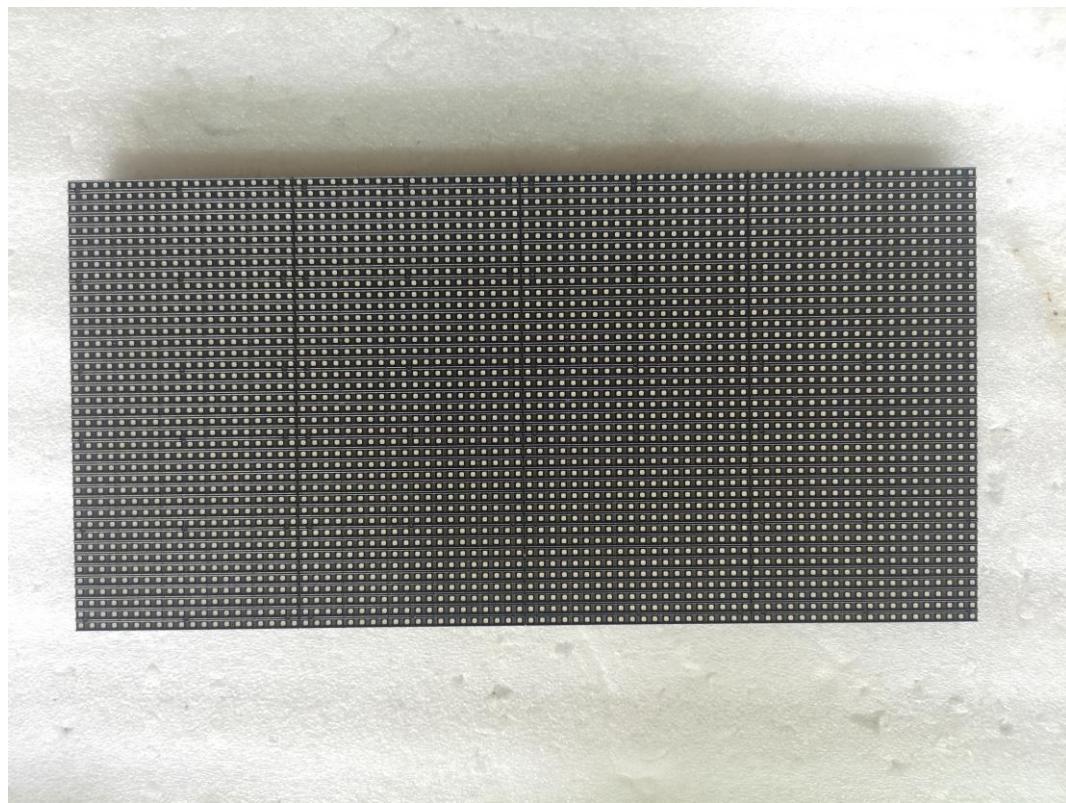

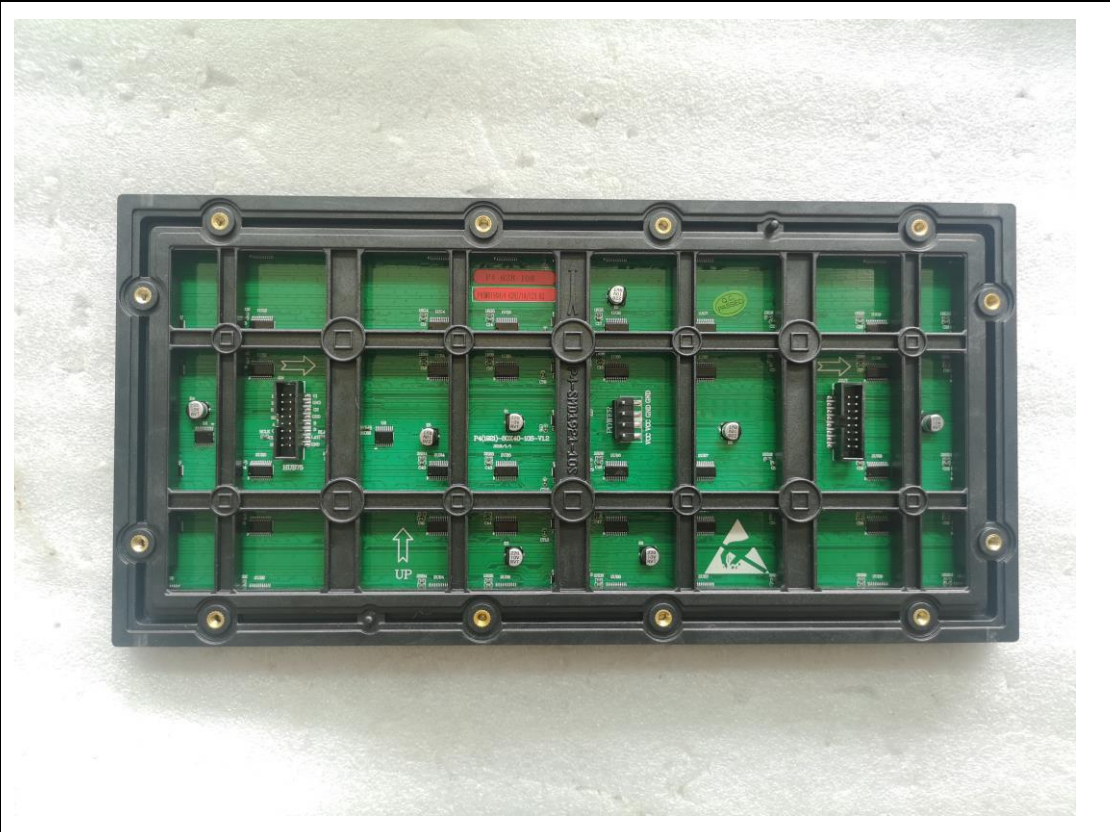

### Module Parameter

Pixel Pitch	4mm
Pixel Configuration	SMD2525
Density	62,500 pixels/m <sup>2</sup>
Module Resolution	80pixel(L) * 40pixel(H)
Module Dimension	320mm(L) * 160mm(H) * 25mm(D)
Driving Mode	Constant current, 1/10 duty
Module Mask	Pure black mask---high contrast screen

### Electricity Parameter

#### Optical Ratings

Brightness	≥5500 cd/m <sup>2</sup>
Viewing Angle	120°(Horizontal); 120°(Vertical)
Best Viewing Distance	≥4m
Gray Grade	14 bit
Display Color	4.4 trillion colors
Brightness Adjustment	100 grades by software or automatically by sensor
Max. Power Consumption	46W

#### Control System

Frame Frequency	60Hz
Refresh Frequency	≥1920Hz
Input Signal	Composite Video, S-video, DVI, HDMI, SDI, HD-SDI
Control Distance	100m(Ethernet cable);

	20KM(optical fiber cable)
Support VGA Mode	800*600, 1024*768, 1280*1024, 1600*1200
Color Temperature	5000—9300 adjustable
Brightness Correction	Pixel by pixel, module by module, cabinet by cabinet
<b>Reliability</b>	
Working Temperature	-20~+60 ℃
Storage Temperature	-30~+70 ℃
Working Humidity	10%~90% RH
Lifetime	100,000 hours
MTBF	5000 hours
Continuous Operating Time	≥72 hours
Protection Grade	IP65
Out-of-Control Pixel Rate	≤0.01%

### Package





